


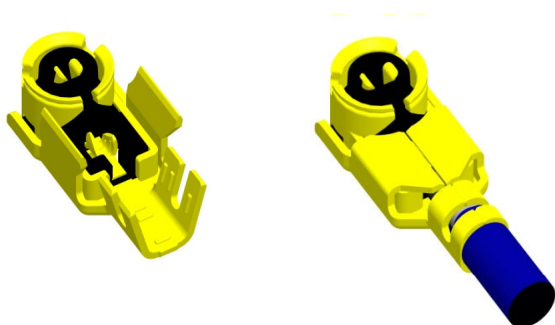

Features:

Mating Height : **2.5mm**




Industry Standard Product

Supports OD1.13 mm~OD1.80mm Cable

High-Frequency Option Available¹

RoHS II Compliant

Halogen Free²

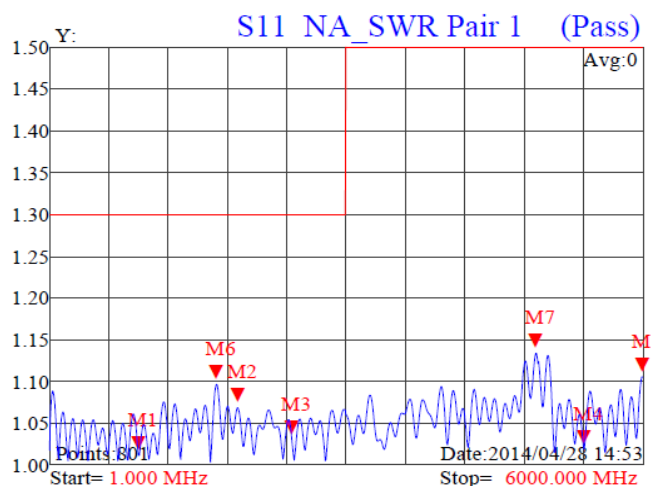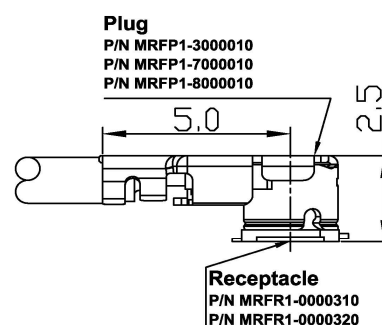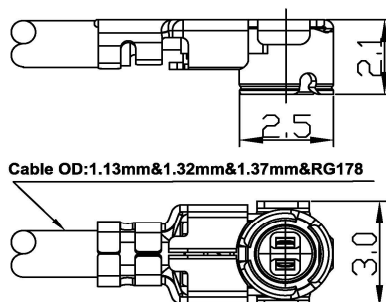

- 1.) DC~6GHz, VSWR < 1.5 (Industry Standard)
DC~15GHz, VSWR < 1.5 (Available for Special Order)
- 2.) Cl + Br (halogen) 1,500 PPM (Industry Standard)
F + Cl + Br + I (Halogen Family, 300 PPM Available for Special Order)

SALES OFFICES

Headquarters & Intl'Sales Office

Harumoto Technology(ShenZhen)Co.,Ltd

No.4 The Sixth Industrial Park Mashantou Village, Gongming Town, Guangming New Zone, Shenzhen, China

Tel : +86-755-2771-0581 ext 203

Cell Phone : +86-135-1098-7717

E-mail : fae@harumoto.com service@harumoto.com salesassistant@harumoto.com

Web Site : www.harumoto.com